
# Excelon® Lockout Valves 1/4" to 3/4" Port Size

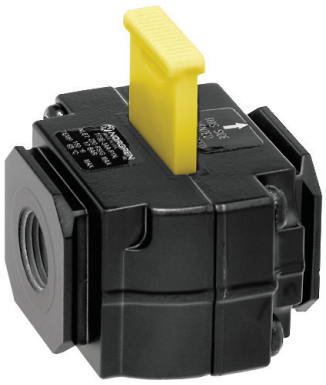

- Excelon® design allows in-line or modular installation
- Valves can be locked in the closed position only
- Excelon® 3-port/2-position lockout valves help conform to OSHA Lockout regulations in USA market.

## Technical data

**Fluid:**
Compressed air, neutral gases

NOTE: Contact technical support for use with other media.

**Maximum Pressure:**
250 psig (17 bar)

**Operating Temperature*:**
-30° to 150°F (-34° to 65°C)

* Air supply must be dry enough to avoid ice formation at temperatures below 35°F (2°C).

**Cv factor from IN to OUT ports**
72 1/4" ports: 4.0
73 3/8" ports: 8.0
74 1/2" ports: 8.1
74 3/4" ports: 7.7

**Cv factor from OUT to Exhaust ports on 3-port/2-position valves:** 0.2.

**Exhaust port threads on T72T and T73T models:** 10-32

**Exhaust port threads on T74T models:**
1/8 PTF with PTF main ports
1/8" ISO Rc with ISO G main ports



**Hole diameter in slide for padlock:** 72 and 73: 5/16" (8 mm)

**Hole diameter in slide for padlock:** 0.29" (7.5 mm)

**Materials**
Body: zinc
Slide: acetal plastic
Elastomers: nitrile

## Order Information

Models listed are with PTF threads.

| ISO Symbols | Port Size | 2-Port/2-Position No exhaust outlet | 3-Port/2-Position (OSHA) Unthreaded exhaust port | 3-Port/2-Position Threaded exhaust port | Weight lbs (kg) |
|---|---|---|---|---|---|
|  2-Port/2-Position | 1/4" | T72B-2AA-P1N | T72E-2AA-P1N | T72T-2AA-P1N | 0.79 (0.36) |
| | 3/8" | T72B-3AA-P1N | T72E-3AA-P1N | T72T-3AA-P1N | 0.86 (0.39) |
| | **Port Size** | **2-Port/2-Position No exhaust outlet** | **3-Port/2-Position (OSHA) Unthreaded exhaust outlet** | **3-Port/2-Position Threaded exhaust port** | **Weight lbs (kg)** |
| | 1/4" | T73B-2AA-P1N | T73E-2AA-P1N | T73T-2AA-P1N | 0.7 (0.3) |
| | 3/8" | T73B-3AA-P1N | T73E-3AA-P1N | T73T-3AA-P1N | 0.7 (0.3) |
| | 1/2" | T73B-4AA-P1N | T73E-4AA-P1N | T73T-4AA-P1N | 0.7 (0.3) |
|  3-Port/2-Position | **Port Size** | **2-Port/2-Position Padlock closed only No exhaust outlet** | **3-Port/2-Position (OSHA) Padlock closed only Unthreaded exhaust port** | **3-Port/2-Position Padlock closed only Threaded exhaust port** | **Weight lbs (kg)** |
| | 3/8" | T74B-3AA-P1N | T74E-3AA-P1N | T74T-3AA-P1N | 0.69 (0.32) |
| | 1/2" | T74B-4AA-P1N | T74E-4AA-P1N | T74T-4AA-P1N | 0.65 (0.30) |
| | 3/4" | T74B-6AA-P1N | T74E-6AA-P1N | T74T-6AA-P1N | 0.62 (0.28) |


## Service kits*

| Type | Part Number |
|---|---|
| T72 | 4384-513 |
| T73B (black slide) | 4384-610 |
| T73E (yellow slide) | 4384-611 |
| T73T (red slide) | 4384-612 |
| T74B (black slide) | 4384-711 |
| T74E (yellow slide) | 4384-710 |
| T74T (red slide) | 4384-713 |


* Service kit includes seals and slide.


Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document. (2017 - 9217c) © 2020 IMI International s.r.o.


## T72

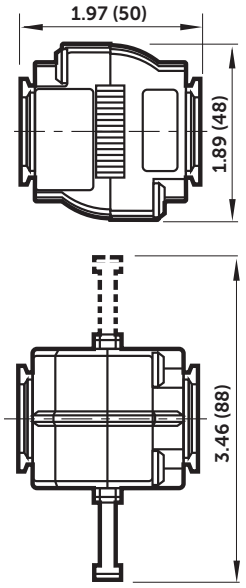


## T73

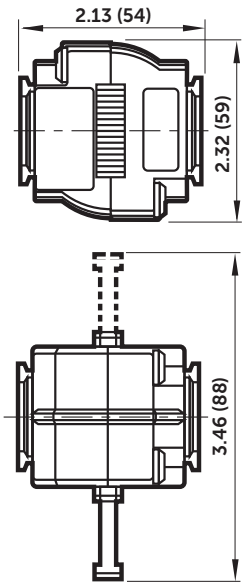


## T74

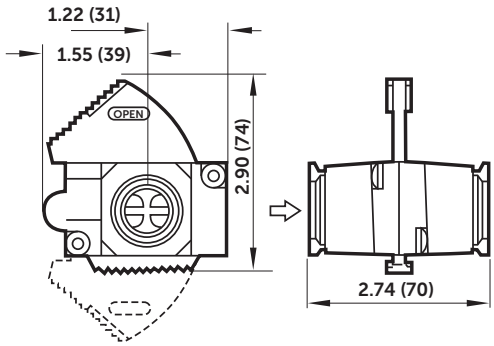


Dimensions in inches (mm)



Our policy is one of continued research and development. We therefore reserve the right to amend, without notice, the specifications given in this document. (2017 - 9217c) © 2020 IMI International s.r.o.